



TECHNICAL SPECIFICATION

Clamp spotlight for single ended HID lamps with twist- and lock fitting. High quality reflector with medium beam spread. Lamp housing of aluminium and gear housing of plastic. NL Power electronic ballast built in fixture housing for optimal lamp life, light flow and colour performance. Very easy reflector removal to ease lamp changes. LED indicator for visual indicating system.


Easy fixing to Fixpoint grid ceiling profile edges. Can easily be moved within the grid ceiling square for maximum light adjustment.

Technical data



| | |
|-----------------------|---------------------------------------------|
| Mains (input) voltage | 120 or 240 V |
| Total weight | 0,66 kg |
| Form of protection | IP 20, class I |
| Lamp type | MT-C 20 W, Gu6,5 |
| Operating position | 355°/90° |
| Lamp holder | Gu6,5 |
| Energy consumption | 23 W |
| Start time Approx. | 3 minutes to full lumen output |
| Safety glass | Included |
| Reflector | High quality anodised cylindrical reflector |
| Beam spreads | Medium, Flood |

| PICTURE | DESCRIPTION | REFLECTOR | ART NO. |
|---------|-----------------|-----------|---------|
| | Clamplight 20 E | Medium | - |
| | Clamplight 20 E | Flood | - |

MEASUREMENTS:

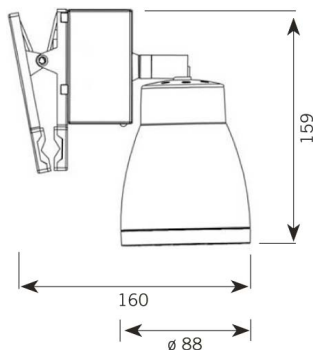

Medium, 19°

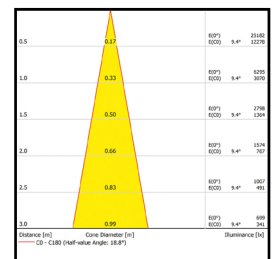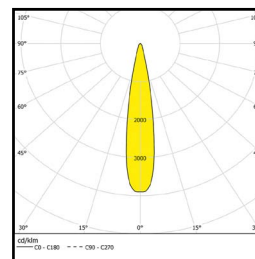

Flood, 31°

