

PENDULUM LIGHTS - GLOBE 35 E / 70 E



TECHNICAL SPECIFICATION

Pendulum incorporating electronic gear for G12 HID lamps. High quality cylindrical reflector with flood beam spreads. Housing of die-cast aluminium for optimal stability and low weight. NL Power electronic ballast integrated in fixture aluminium housing for optimal lamp life, light flow and colour performance.

Models and colours


Available with lampshade in brushed aluminium or white plastic. Mounting for monopoint or in track.

Technical data

Mains (input) voltage	120 - 277 V
Total weight	4,4 kg
Form of protection	IP 20, class I
Lamp type	MT 70 W / 150 W, G12
Operating position	Vertical
Lamp holder	G12
Start time Approx.	3 minutes to full lumen output
Safety glass	Included
Reflector	High quality anodised cylindrical reflector
Beam spreads	Spot, Flood

ART NO	DESCRIPTION	TYPE	COLOUR LAMP SHADE
	Globe Grey	Spot / 70 W	Brushed aluminium
	Globe Grey	Flood / 70 W	Brushed aluminium
	Globe Grey	Spot / 150 W	Brushed aluminium
	Globe Grey	Flood / 150 W	Brushed aluminium
	Globe White	Spot / 70 W	White plastic
	Globe White	Flood / 70 W	White plastic
	Globe White	Spot / 150 W	White plastic
	Globe White	Flood / 150 W	White plastic
	Track bracket	White Grey Black	-
	Monopoint with bracket	White Grey Black	-

MEASUREMENTS:

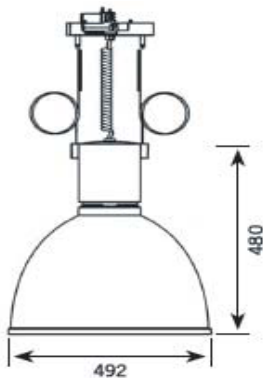

Track bracket



Monopoint with bracket