

# PENDULUM LIGHTS - GLOBE MINI 35 E / 70 E



## TECHNICAL SPECIFICATION

Pendulum incorporating electronic gear for G12 HID lamps. High quality cylindrical reflector with flood beam spreads. Housing of die-cast aluminium for optimal stability and low weight. NL Power electronic ballast integrated in fixture aluminium housing for optimal lamp life, light flow and colour performance.

### Models and colours

Available in black colours. Lampshade in brushed aluminium. Aluminium shade with black "snaps" and decorative glass. Mounting for monopoint or in track.


### Technical data

Mains (input) voltage	120 - 277 V
Total weight	3,14 kg
Form of protection	IP 20, class I
Lamp type	MT 35 W / 70 W, G12
Operating position	Vertical
Lamp holder	G12
Energy consumption	44 / 81 W
Start time Approx.	3 minutes to full lumen output
Safety glass	Included
Reflector	High quality anodised cylindrical reflector
Beam spreads	Spot, Flood



ART NO	DESCRIPTION	REFLECTOR/LAMP TYPE	COLOUR
1010-1730	Grey with black Aluminium Snaps	Flood / 35 W	BLACK
1010-1733	Grey with black Aluminium Snaps	Flood / 70 W	BLACK
1731 1731-W 1731-G	Monopoint		BLACK WHITE GREY



MEASUREMENTS:

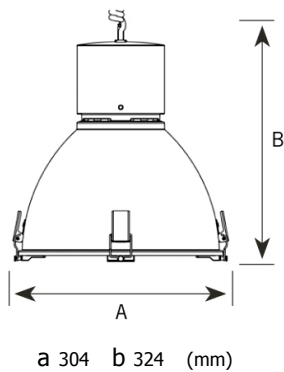

Flood 35 W, 39°

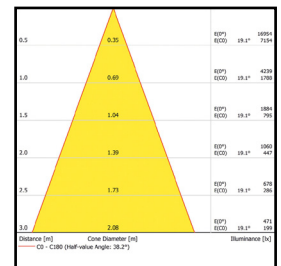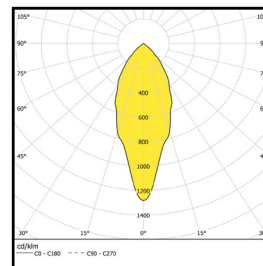

Flood 70 W, 54°

