

# TREND HOOK 35/70E FOR FIXPOINT 100-50



## TECHNICAL SPECIFICATION

Spotlight with incorporated electronic gear for G12 HID lamps. High quality reflector with three different beam spreads. Lamphousing and gear of aluminium. NL Power electronic ballast built in fixture housing for optimal lamp life, lightflow and colour performance. Very easily reflector removal for easy lamp changes. LED indicator for visual indicating system. Colour filter adapted.


Easy fixing to Fixpoint grid ceiling profile edges. Can easily be moved within the grid ceiling square for maximum light adjustment.

For Fixpoint profil 100-50 profile only.

### Technical data

Mains (input) voltage	120 or 277 V
Total weight	1,85 kg
Form of protection	IP 20, class I
Lamp type	MT 35/70 W, G12
Operating position	355°/90°
Lamp holder	Gu6,5
Energy consumption	44/81 W
Start time Approx.	3 minutes to full lumen output
Safety glass	Included
Reflector	High quality anodized cylindrical reflector
Beam spreads	Spot, Medium, Flood

ART NO.	DESCRIPTION	REFLECTOR	LAMP WATT
Trend Hook 35 E SPOT	Trend Hook 35 E SPOT	12°	35 W
Trend Hook 35 E MEDIUM	Trend Hook 35 E MEDIUM	24°	35 W
Trend Hook 35 E FLOOD	Trend Hook 35 E FLOOD	75°	35 W
Trend Hook 35 E SPOT	Trend Hook 70 E SPOT	12°	70 W
Trend Hook 35 E MEDIUM	Trend Hook 70 E MEDIUM	24°	70 W
Trend Hook 35 E FLOOD	Trend Hook 70 E FLOOD	75°	70 W

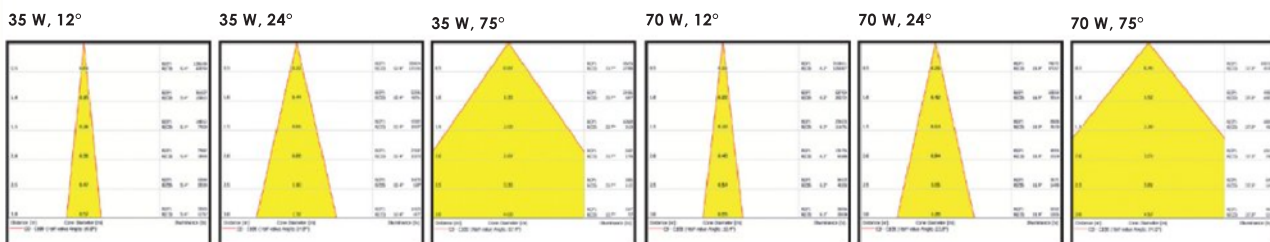

MEASUREMENTS:



Visual Indicating System

