



Naos 6060

Recessed LED-panel for 600x600 T24-profile ceiling structure system.

Can be installed directly to ceiling structure with a frame accessory.


LED Driver with 3,0 meter cable and 2-pin EU-plug.

Available in LED with colour 3000 K, 3500 K and 4000 K.

Warranty 5 years

Colour: White

Material	Aluminium / Polycarbonate
Colour temp [K]	3000 K / 3500 K / 4000 K
Design LED life	L70 50 000 h (T _a 25°)
CRI	+80
Initial MacAdam	3 SDCM
Lumen/watt	120 lm/watt
Lumen range	2500 - 4250 lm (22 - 40 W)
Nominal Voltage	230/240 V, 50 Hz
Form protection	IP20. Class III. CE-approved
Weight	0,69 kg
Connection	3,0 Meter cable and EU plug
Dimensions	594 x 594 x 10 mm

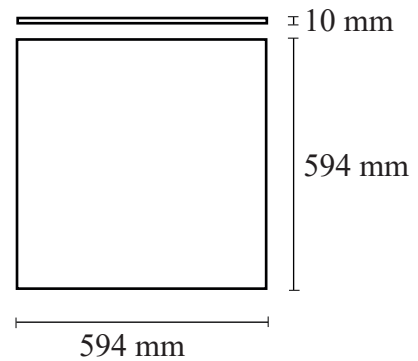

Item No.	Description	Reflector	Dimensions	Painting colour	Energy consumption	Lumen output	Colour temperature, CRI
9290 016 87706	Naos LED Panel 6060 830 MD2	White	594x594 mm	White	22 W - 40 W	2850 - 4240	3000 K, CRI 80
9290 028 28006	Naos LED Panel 6060 835 MD2	White	594x594 mm	White	22 W - 40 W	2850 - 4240	3500 K, CRI 80
9290 016 87806	Naos LED Panel 6060 840 MD2	White	594x594 mm	White	22 W - 40 W	2850 - 4240	4000 K, CRI 80
161005 1400 DS	LED Driver 700 - 1500 mA, 3,0 M power cable with EU socket						

Caleidoscope