

Naos 6060



Naos 6060



Recessed LED-panel for 600x600 T24 false ceiling structure.

Can be installed directly to ceiling structure with a frame accessory.


Supplied with 3,0 meter cable and 2-pin plug.

Available in LED with colour 3000 K or 4000 K, Ra80 or Ra90.

Colour: White

Art. No:	Description	Colour	Power	Lumen Out	CCT (Kelvin)	Dimension	System
150928-830-01	Naos 31 W, 3000 K, Ra83, 3,0 meter cable and plug	White	31 W	2850 lm	3000 K, Ra > 83	594x594 mm	T24 false ceiling
150928-830-02	Naos 41 W, 3000 K, Ra83, 3,0 meter cable and plug	White	41 W	3600 lm	3000 K, Ra > 83	594x594 mm	T24 false ceiling
150928-930-02	Naos 41 W, 3000 K, Ra90, 3,0 meter cable and plug	White	41 W	3186 lm	3000 K, Ra > 90	594x594 mm	T24 false ceiling
160429-001-A	Frame,Naos 6060, WHITE, H50 MM	White					

Technical data

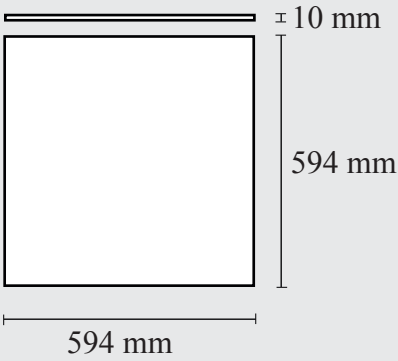

Installation	False ceiling structure 600x600 / T-24, or support frame.
Designed lifetime:	L70 B10 > 50 000 h.
CRI	> 90
Lumen output	2850 - 3186 lm
Protection class	IP 20. Class III. CE-godkänd.
Support frame	Item No: 160429-001-A