



CERCO

Linear circular LED luminaire designed in narrow aluminum profile 10 x 40 mm.

Available in white, grey or black.

3 different sizes with diameter 800/1200 or 1500 mm.

Light output: 2231 lm (D800), 3544 lm (D1200) and 4485 lm (D1500)


As an accessory, the open space can be filled with PET-acoustic absorbent in white, grey or black for D800 and D1200.

Pendulum with associated wire system that serves as a low voltage supply for the LED light source.

Including driver that shall be placed hidden in the ceiling structure above. Maximum suspension lenght from luminaire to driver 2,0 m.

Material	Die-cast aluminium
Colour temp [K]	3000 K or 4000 K
Design LED life	L70 B10 > 50 000 h (T _a 25°)
CRI	80
Initial MacAdam	3 SDCM
Power	30 W / 42 W / 57 W
Nominal Voltage	230/240 V, 50 Hz
Form protection	IP 20. Class I. CE-approved

Dimensions [mm]

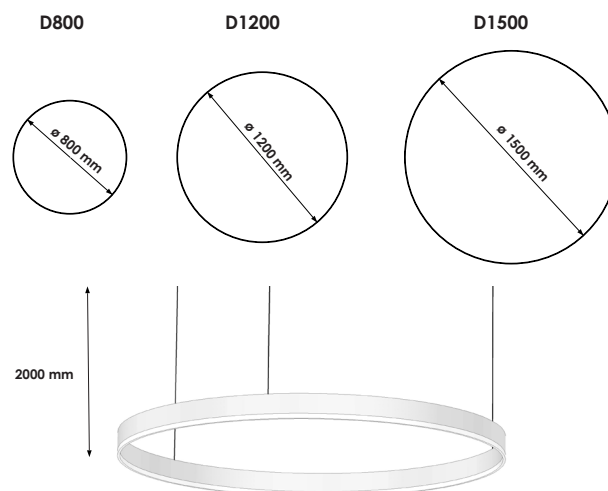

Item No.	Description	Reflector /Beam	Painting colour	Energy consumption	Lumen output	EEC	Colour temperature, CRI
180105-830-800-0(*)	CERCO LED, 3000 K, ø 800 mm, ON/OFF, White	Opal/ Flood	White * = 1 Grey * = 2 Black * = 3	30 W	2231lm	A	3000 K, CRI > 80
180105-830-1200-0(*)	CERCO LED, 3000 K, ø 1200 mm, ON/OFF, White	Opal/ Flood	White * = 1 Grey * = 2 Black * = 3	42 W	3544 lm	A	3000 K, CRI > 80
180105-830-1500-0(*)	CERCO LED, 3000 K, ø 1500 mm, ON/OFF, White	Opal/ Flood	White * = 1 Grey * = 2 Black * = 3	57 W	4485 lm	A	3000 K, CRI > 80

Caleidoscope