



ultraBEAM LED G3

A very powerful and extremely high efficient LED lighting for general lighting with two LED strips and double parabolic reflector.

Adapted for installation in grid ceiling with beam dimensions of 80x100 mm c/c 2,0 m.

Available with narrow or medium reflectors for optimal light distribution.


7-years LED and driver warranty.

Material
Colour temp [K]
Design LED life
Driver lifetime
CRI
Initial MacAdam
Lumen range
Nominal Voltage
Form protection
Weight
Connection


Powder painted steel
 3000 / 3500 K or 4000 K
 L80 B10 > 80 000 h (T_g 25°)
 100 000 h
 +80
 3 SDCM
 5 248 - 5 525 lm
 230/240 V, 50 Hz
 IP 20. Class I. CE-approved
 2,7 kg
 3,5 m cable with 2-pin plug on separate driver
 On request

Dail

Dimensions [mm]

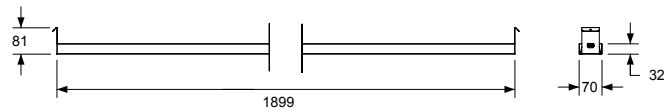


Flood

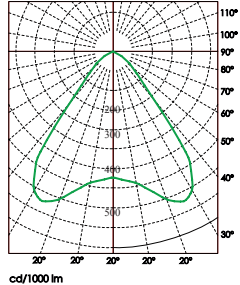


cd/1000 lm

Narrow

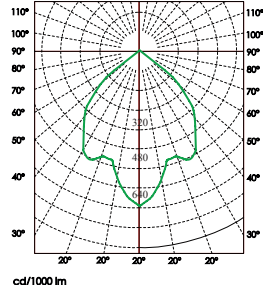

cd/1000 lm

Installation in profile / module

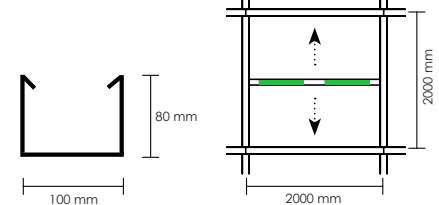

Item No.	Description	Reflector /Beam	Painting colour	Energy consumption	Lumen output	EEC	Colour temperature, CRI	Amount/Fuse 16 A C-type	Amount/Fuse 16 A B-type
150130 830 10 15	ultraBEAM LED G3, 830, White, F2x2	Flood	White	Select driver *	See selected driver	A++	3000 K, CRI > 80		
150130 835 10 15	ultraBEAM LED G3, 835, White, F2x2	Flood	White	Select driver *	See selected driver	A++	3500 K, CRI > 80		
150130 840 10 15	ultraBEAM LED G3, 840, White, F2x2	Flood	White	Select driver *	See selected driver	A++	4000 K, CRI > 80		
150130 830 20 15	ultraBEAM LED G3, 830, White, F2x2	Narrow	White	Select driver *	See selected driver	A++	3000 K, CRI > 80		
150130 835 20 15	ultraBEAM LED G3, 835, White, F2x2	Narrow	White	Select driver *	See selected driver	A++	3500 K, CRI > 80		
150130 840 20 15	ultraBEAM LED G3, 840, White, F2x2	Narrow	White	Select driver *	See selected driver	A++	4000 K, CRI > 80		
161005 900	LED Driver 900 mA, 3,5 m cable and plug			27 W	3800 lm			42	25
161005 1050	LED Driver 1050 mA, 3,5 m cable and plug			30 W	4 300 lm			42	25
161005 1200	LED Driver 1200 mA, 3,5 m cable and plug			35 W	5000 lm			42	25
161005 1300	LED Driver 1300 mA, 3,5 m cable and plug			39 W	5300 lm			30	18
161005 1400	LED Driver 1400 mA, 3,5 m cable and plug			41 W	5 700 lm			30	18
161005 1500	LED Driver 1500 mA, 3,5 m cable and plug			45 W	6 000 lm			25	15
161005 1700	LED Driver 1700 mA, 3,5 m cable and plug			50 W	6 700 lm			25	15
161005 1800-G2	LED Driver 1800 mA, 3,5 m cable and plug			55 W	7 250 lm			20	12
161005 2000	LED Driver 2000 mA, 3,5 m cable and plug			64 W	8 100 lm			20	12

Caleidoscope