

SQUARE




SQUARE



Small narrow linear downlight with very high anti-glare factor with URG > 12. Passive cooling of the LED chip for optimal service life and reliability.


Available in different lumenpackage from 185 lm up to 1480 lumen.

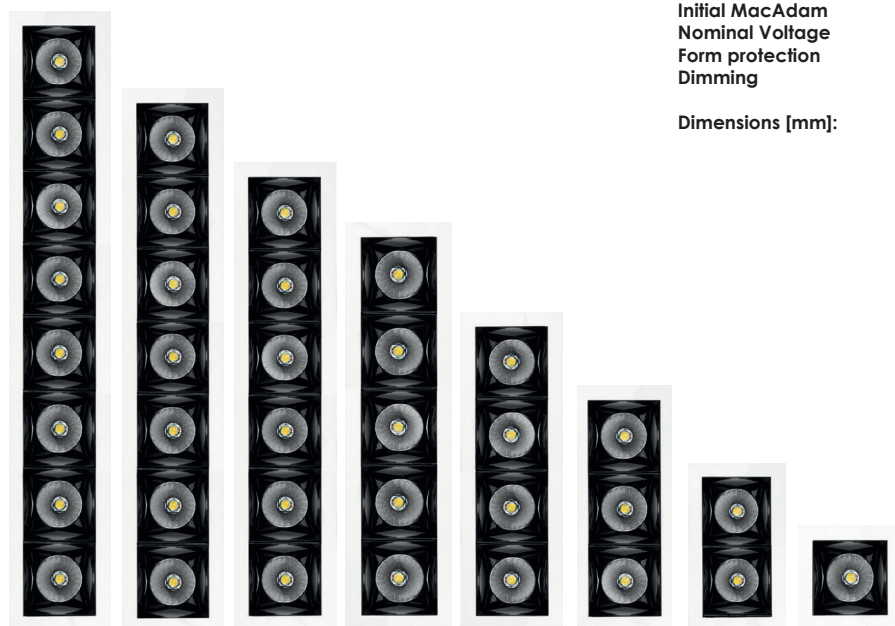

Material
Colour temp [K]
Design LED life
CRI
Initial MacAdam
Nominal Voltage
Form protection
Dimming

Die-cast aluminium
 3000 K / 3500 K / 4000 K
 L70 B10 > 50 000 h (T_a 25°)
 > 90
 2 SDCM
 230/240 V, 50 Hz
 IP 20, Class III, CE-approved
 Triac / 1-10 V / Dali

Dimensions [mm]:

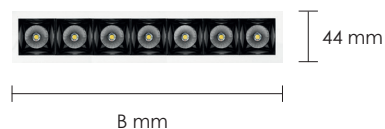

Item No.	Description	Dimension B X L	Cut- out	Painting colour	Power	Lumen output	EEC	LED Colour	Amount/ Fuse 16 A C-type	Amount/ Fuse 16 A B-type
DR-A097-CBJH	Square 1 x 185 LM	44x44	38x38	WH/GREY/BLK	2.1 W	185 lm	A+	3000 K / 3500 K / 4000 K	51	32
DR-A097-2-2-CBJH	Square 2 x 185 LM	44x74	38x69	WH/GREY/BLK	2x2.1 W	370 lm	A+	3000 K / 3500 K / 4000 K	51	32
DR-A097-3-3-CBJH	Square 3 x 185 LM	44x105	38x99	WH/GREY/BLK	3x2.1 W	550 lm	A+	3000 K / 3500 K / 4000 K	51	32
DR-A097-4-4-CBJH	Square 4 x 185 LM	44x135	38x130	WH/GREY/BLK	4x2.1 W	740 lm	A+	3000 K / 3500 K / 4000 K	51	32
DR-A097-5-5-CBJH	Square 5 x 185 LM	44x146	38x141	WH/GREY/BLK	5x2.1 W	925 lm	A+	3000 K / 3500 K / 4000 K	51	32
DR-A097-6-6-CBJH	Square 6 x 185 LM	44x196	38x191	WH/GREY/BLK	6x2.1 W	1110 lm	A+	3000 K / 3500 K / 4000 K	51	32
DR-A097-7-7-CBJH	Square 7 x 185 LM	44x227	38x221	WH/GREY/BLK	7x2.1 W	1259 lm	A+	3000 K / 3500 K / 4000 K	51	32
DR-A097-8-8-CBJH	Square 8 x 185 LM	44x257	38x252	WH/GREY/BLK	8x2.1 W	1480 lm	A+	3000 K / 3500 K / 4000 K	51	32

Caleidoscope