



plainLED G4 TW, Casambi


LED spotlight with integrated tuneable white Casambi technology for mounting on 3-phase track.

Passive cooling of the LED chip for optimal service life and reliability. Each spotlight is including with an additional reflector kit with 17° spot and 54° degree.

Material	Die-cast aluminium
Colour temp [K]	3000 K B BBL
Design LED life	L70 B10 > 50 000 h (T ₀ 25°)
CRI	> 90
Initial MacAdam	2 SDCM
Nominal Voltage	230/240 V, 50 Hz
Form protection	IP 20. Class I. CE-approved
Bluetooth control system	Casambi Bluetooth Control System
Weight	0,7 kg

Dimensions [mm]:

Colours [*]

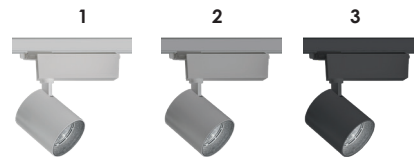

CASAMBI

XPRESS-W

Xpress Casambi Wall Mounted Programmable switch.




Bluetooth Control

Casambi Software can be downloaded to your iOS or Android device.



Tunable White - 2700 - 6500 K
Dimmable 0 - 100 %

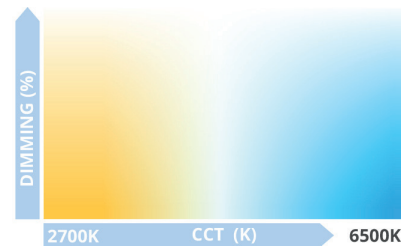

Item No.	Description	Painting colour	Power	Lumen output	EEC	LED Colour	Amount/ Fuse 16 A C-type	Amount/ Fuse 16 A B-type
016-TW02-2001-G4-CASAMBI	plainLED+ G4, Medium 20°, Tunable White	White	32 W	2900 lm	A+	3000 K B BBL	51	32
016-TW02-2002-G4-CASAMBI	plainLED+ G4, Medium 20°, Tunable, Grey	Grey	32 W	2900 lm	A+	3000 K B BBL	51	32
016-TW02-2003-G4-CASAMBI	plainLED+ G4, Medium 20°, Tunable Black	Black	32 W	2900 lm	A+	3000 K B BBL	51	32
XPRESS-W	Xpress Casambi Wall Mounted Switch	White						

Caleidoscope