

smartLED™ Edge

LED-spotlight with unique patented fixing holder for functional grid ceiling systems.

The LED driver is designed for easy placement inside Caleidoscope grid channels. Three (3) spotlights can be connected to one (1) LED driver with the included 3,0 meter cable system.

The spotlight is attached by a combination of strong neodymium magnets with permanent traction and a "hook-on" edge for easy attachment to the grid profile.




System can be connected to eSAVE system for maximum energy and light control.

Material

Color temp [K]
Design LED life
CRI
Lumen
Initial MacAdam
Nominal Voltage
Form protection
Weight
Colors
eSAVE Driver

Die-cast aluminium and plastic housing
 3000 K B BBL
 L90 50 000 h (T_a 25°)
 90
 3000 lm
 2 SDCM
 230/240 V, 50/60 Hz
 IP 20. Class III. CE-approved
 0,65 kg (spot) + 0,35 kg (driver)
 White
 Yes

Dimensions

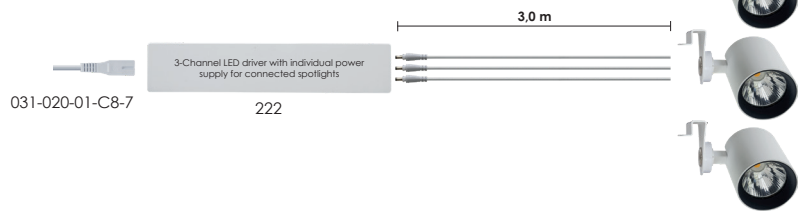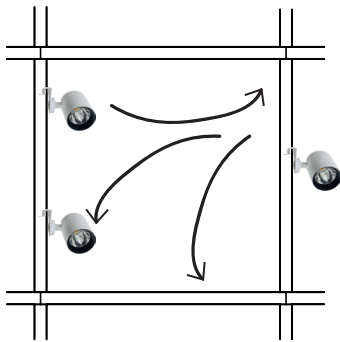

Item No.	Description	Painting colour	Power	Lumen	Reflector	EEC	LED Colour	Amount/ Fuse 16 A C-type	Amount/ Fuse 16 A B-type
222 3930 20	smartLED White, Medium 20°, 3000 K B BBL (3,0 M connection cable included)	White	23 W	3000 lm	20° (Medium)	A+	3000 K Below BBL	45	27
222 3930 38	smartLED, White, Flood 38°, 3000 K B BBL (3,0 M connection cable included)	White	23 W	3000 lm	53° (Flood)	A+	3000 K Below BBL	45	27
222	smartLED Driver 3x600 mA ON/OFF	White						15	9
222e	eSAVE Driver 3x600 mA	White						17	10
031-010-C8C7-2M	Power Cable 2,0 m (2x0,72 mm2) C8 + C7, White	White							
A-3022	2,0 M extension cable for smartLED spotlights. Male/female connectors.	White							

Caleidoscope