



BaratLED

Surface mounted waterproof LED luminaire for use in extreme temperature -8 to +40°C environments.

Light distribution type: direct

Optical system: opal polycarbonate diffuser, UV stable, impact resistant

Housing: polycarbonate

Colour: light grey


Material	Polycarbonate
Colour temp [K]	3000 / 4000 K
Design LED life	L90 50 000 h (T _a 25°)
Driver lifetime	100 000 h
CRI	+80
Initial MacAdam	3 SDCM
Lumen range max	10 356 lm
Nominal Voltage	230/240 V, 50 Hz
Form protection	IP66, Class III, CE-approved
Mechanical resistance	IK10
Weight	2,1 kg - 2,6 kg
Connection	Push-in terminal, 5x2x2.5mm ²

Available options

MW - Micro Wave Sensor
Corridore driver
Dali



9002154 2 x Suspension MTG KIT 1.5m

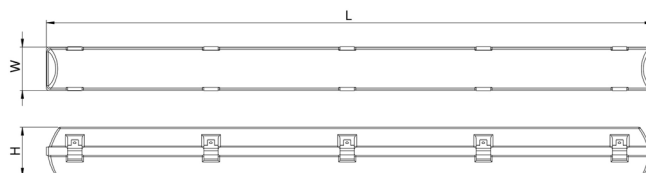

Item No.	Description	Reflector	Dimensions	Painting colour	Energy consumption	Lumen output	Colour temperature, CRI
1105246	Barat LED1x6750 G250 T840 PC/PC OP LT80	Opal diffuser	L 1272 x H96 x W111mm	Light grey	41 W	6368 lm	4000 K, CRI 80
1105247	Barat LED1x8950 G251 T840 PC/PC OP LT80	Opal diffuser	L 1272 x H96 x W111mm	Light grey	52 W	8950 lm	4000 K, CRI 80
1105248	Barat LED1x12050 G252 T840 PC/PC OP LT80	Opal diffuser	L 1572 x H96 x W111mm	Light grey	70 W	12 050 lm	4000 K, CRI 80
9002154	2 x Suspension MTG KIT - 1.5m						

Caleidoscope