



calimaLED

Suspended LED luminaire for office application.

Light distribution type: Direct and indirect


Optical system: matt micro-prismatic PMMA diffuser, low glare/ translucent micro-prismatic PMMA diffuser

Housing: steel


Colour: white (RAL9003)

Material	Steel
Colour temp [K]	3000 K
Design LED life	L90 50 000 h (T _a 25°)
CRI	80
Initial MacAdam	3 SDCM
Lumen range max	4 622 lm (@ 29,6 W)
Nominal Voltage	230/240 V, 50 Hz
Form protection	IP40 Class II. CE-approved
Mechanical resistance	IK02
Weight	4,6 kg
Connection	Suspended (accessories to be ordered separately), with L/LL option is designed for in-line connection. Push-in terminal, 3x2x2.5mm ²

Available options DALI



Suspension kit
Item ref. 9002118

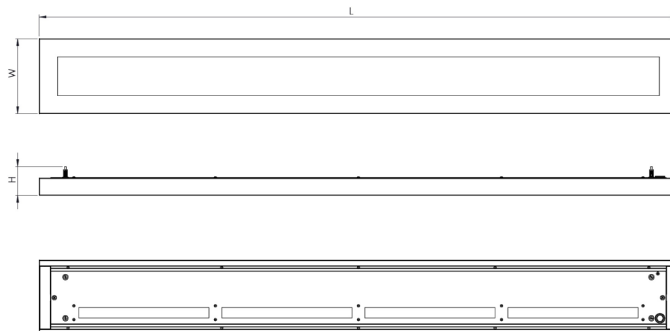

Item No.	Description	Reflector	Dimensions	Painting colour	Energy consumption	Lumen output	Colour temperature, CRI
1105633	Calima U LED1x2700/2200 G179 T830 DPRZ LT80 LG3	Microprismatic	L 1215 x W 175 x H 40 mm	White	29,6 W	4622 lm	3000 K, CRI 80
1105633 D	Calima U LED1x2700/2200 G179 T830 DPRZ LT80 LG3 Dali	Microprismatic	L 1215 x W 175 x H 40 mm	White	29,6 W	4622 lm	3000 K, CRI 80
9002118	Suspension MTG KIT SUSY						
	Pre-mounted power cables:						
1105633	CBF3-2.0m clear (On/off version)						
1105633	CBF3-2.0m clear (For Dali)						

Caleidoscope

Östra Sandgatan 14 - 252 27 Helsingborg - Sweden - sales@caleidoscope.se - www.caleidoscope.se - Tel +46(0)42 311 18 10