



## Libra 3PLED G117 OP AUT

Surface mounted LED emergency exit sign

Light distribution type: direct

Optical system: opal polycarbonate diffuser, impact resistant

Housing: polycarbonate


Colour: white

Battery charging time: 24 hours

Battery: LiFePO4

Recognition distance: 20 meters

<b>Mains voltage</b>	220-240 V 50/60 Hz
<b>Colour temp [K]</b>	6500 K
<b>Design LED life (T<sub>a</sub> 25° )</b>	50000/L70B50
<b>Emergency operating time, h</b>	3 h
<b>CRI</b>	80
<b>Connection</b>	Push-in terminal, 4x2x2.5mm <sup>2</sup>
<b>Total energy</b>	1 W
<b>Form protection</b>	IP 65. CE-approved
<b>Mechanical impact resistance</b>	IK08
<b>Weight</b>	0,5 kg
<b>Dimensions [mm]</b>	L350 x W110 x H60 mm

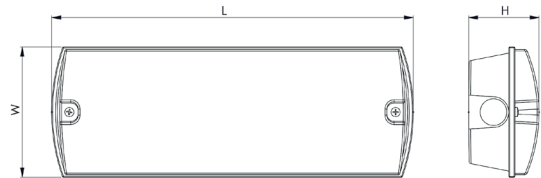

Item No.	Description	Reflector /Beam	Colour	Energy consumption	Recognition distance:	Colour temperature, CRI
1105098	Libra 3PLED G117 OP AUT	Other	Grey	1 W	20 meters	6500 K, CRI > 70

*Caleidoscope*