



Taurus 1PLED G08 Deluxe AUT

Surface mounted double-sided LED emergency exit sign

Light distribution type: omnidirectional

Optical system: clear PMMA diffuser

Housing: extruded aluminium

Colour: light grey

Battery charging time: 12 hours

Battery: NiCd, deep discharge protection

Recognition distance: 30 meters

Mains voltage

Colour temp [K]

Design LED life (T_a 25°)

Emergency operating time, h

CRI

Connection

Total energy

Form protection

Mechanical impact resistance

Weight

Dimensions [mm]

220-240 V 50/60 Hz

6500 K

L80 50 000 h

1 h

80

Push-in terminal,

4x2x2.5mm²

1 W

IP 41. Class III. CE-approved


IK02

1,2 kg

L315 x W48 x H243 mm



Suspension MTG KIT

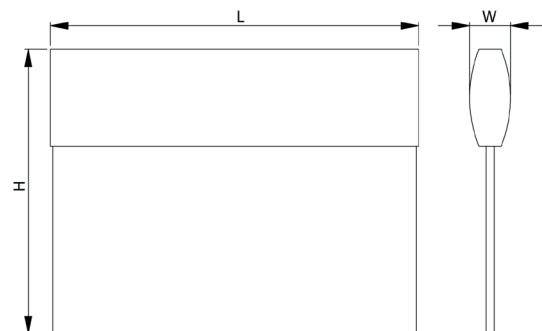

Item No.	Description	Reflector /Beam	Colour	Energy consumption	Recognition distance:	Colour temperature, CRI
1019237	Taurus 1PLED G08 Deluxe AUT	Other	Grey	1 W	30 meters	6500 K, CRI > 80
9030644	Suspension MTG KIT 1.5m (W)					
9030646	Suspension MTG KIT 3.0m (W)					

Caleidoscope