



Levanto UGR

Recessed mounted LED panel with selectable output from the separate driver. Including quick connection cables between LED panel and driver.

3,0 m main power cable with 2-pin europlug.

Light distribution type: direct

Optical system: micro-prismatic diffuser, PS, back-lit, UGR index ≤ 19


Housing: aluminum. Protection class IP40.

Colour: white, RAL9016

Warranty 5 years

Colour: White

Material	Aluminium / Polycarbonate
Colour temp [K]	3000 K / 3500 K / 4000 K
Design LED life	L80 B10 > 50 000 h (T _a 25°)
CRI	+ 80
Initial MacAdam	3 SDCM
System power	18/21/23/25/28 W
Lumen range	2660/3030/3350/3670/4030 LM
Nominal Voltage	230/240 V, 50/60 Hz
Form protection	IP20. Class III. CE-approved
Weight	1,8 kg
Connection	3,0 Meter cable and EU plug
Protection class	IP40
Dimensions	L595 x W595 x H33 mm

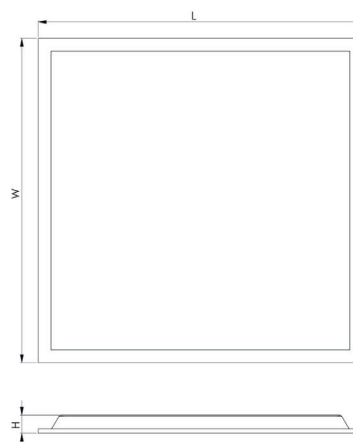

Item No.	Description	Light distribution	Painting colour	Energy consumption	Lumen output	Colour temperature, CRI
1120613	Levanto UGR LED1x2750/3130/3470/3800/4180 J732 T83	Flood 90°	White	Select driver *	2660 - 4030 lumen	3000 K, CRI > 80
1120614	Levanto UGR LED1x2750/3130/3470/3800/4180 J732 T84	Flood 90°	White	Select driver *	2660 - 4030 lumen	4000 K, CRI > 80
9037827	LED Driver Levanto, 3,0 M cable with 2-pin europlug			18 / 21 / 23 / 25 / 28 W		

Caleidoscope

Östra Sandgatan 14 - 252 27 Helsingborg - Sweden - sales@caleidoscope.se - www.caleidoscope.se - Tel +46(0)42 311 18 10